

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US04/022150

International filing date: 09 July 2004 (09.07.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/486,553
Filing date: 09 July 2003 (09.07.2003)

Date of receipt at the International Bureau: 02 September 2004 (02.09.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

August 25, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/486,553

FILING DATE: *July 09, 2003*

RELATED PCT APPLICATION NUMBER: *PCT/US04/22150*

Certified by



Jon W Dudas

Acting Under Secretary of Commerce
for Intellectual Property
and Acting Director of the U.S.
Patent and Trademark Office



Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No.

EV069127244US

INVENTOR(S)

Given Name (first and middle (if any))	Family Name or Surname	Residence (City and either State or Foreign Country)
G. Eric	Engstrom	Kirkland, Washington

☐ Additional inventors are being named on the _____ separately numbered sheets attached hereto

TITLE OF THE INVENTION (500 characters max)

Shared Input Key Method and Apparatus

Direct all correspondence to:

CORRESPONDENCE ADDRESS

☒ Customer Number 000025943
OR Type Customer Number here

Place Customer Number
Bar Code Label here

☐ Firm or
Individual Name

Address

Address

City

State

ZIP

Country

Telephone

Fax

ENCLOSED APPLICATION PARTS (check all that apply)

☒ Specification Number of Pages

17

☐ CD(s), Number

☒ Drawing(s) Number of Sheets

10

☒ Other (specify)

Return receipt postcard

☐ Application Data Sheet. See 37 CFR 1.76

METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT

☐ Applicant claims small entity status. See 37 CFR 1.27.

☒ A check or money order is enclosed to cover the filing fees

☒ The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:

500393

☐ Payment by credit card. Form PTO-2038 is attached.

FILING FEE
AMOUNT (\$)

\$160.00

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are: _____

Respectfully submitted,

SIGNATURE

Date 07/09/2003

TYPED or PRINTED NAME Robert Watt

REGISTRATION NO.

45,890

(if appropriate)

Docket Number:

109909-132451

TELEPHONE 503-222-9981

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

SHARED INPUT KEY METHOD AND APPARATUS

Inventors

G. Eric Engstrom

Wildseed Limited

Attorney Docket Number:

109909-132451

P058Z

Express Mail Label Number: EV069127244US

Mailing Date: July 9, 2003

Schwabe, Williamson & Wyatt
1211 SW Fifth Avenue, Suites 1600-1900
Portland, OR 97204-3795
phone 503.222.9981
fax 503.796.2900

FIELD OF THE INVENTION

The present invention relates to the field of electronic device user interfaces. More specifically, the present invention relates to the design of an input mechanism for use in portable electronic devices.

BACKGROUND OF THE INVENTION

Portable electronic devices have become ubiquitous in today's fast paced society. Various portable electronic devices provide functions from simple personal digital assistant functionality to in-the-field electronic devices which include real-time, high-speed data transfer for use by such professionals as building inspectors and peace officers. All of these devices have in common the need to provide a user with a friendly interface to facilitate the user's provision of information to the device.

Frequently the small nature of these portable electronic devices has provided challenges in providing a user with a friendly interface. Users of traditional, non-portable electronic devices have utilized electronic devices that reside in a wall rack or on a desktop. These traditional devices frequently contained a terminal and an associated standard QWERTY keyboard. This standard QWERTY keyboard was the primary method for providing input to these traditional electronic devices. Thus, users have become familiar with providing input to electronic devices utilizing a QWERTY keyboard interface.

In contrast with standard QWERTY keyboards in use with desktop and larger computers, miniaturized QWERTY keyboards for inputting data to portable electronic devices typically have a reduced key set. For example, typically, on

these miniaturized QWERTY keyboards, the top row of number keys present on a standard QWERTY keyboard, are not present. This reduction in the number of keys present on the QWERTY keyboard is in an attempt to allow the keyboard to fit on the limited surface area of most portable electronic devices.

Figure 1 illustrates a prior art, to-scale portable electronic device **100** utilizing a miniaturized QWERTY keyboard **110** for inputting data. As will be appreciated, most portable electronic devices are compact to allow ease of transport by a user in a pocket or personal carrying device. In addition to the compactness of the device, a significant portion of the surface area that does exist is allocated to a display device **120** for display of text and graphics **125**. This compactness and maximization of the display device **120** has led to the miniaturization of the surface area available for input keyboards such as a miniaturized QWERTY keyboard **110**.

This reduction in surface area for input keyboards has come while trying to maintain full alphanumeric input capability. These competing requirements have resulted in a reduction in input key size as well as a reduction in spacing between input keys. Referring again to Figure 1, note the relative size of the input keys **162** and the spacing between keys **164**. This reduction in key size and spacing can make the use of keys on the miniaturized QWERTY keyboard **110** difficult. Frequently users will press keys inadvertently due to the close proximity and size of the keys. This affects the ability of a user to input data to the portable electronic device.

To overcome the limitations of providing input via keyboards, other user interface options have been developed. These other options for inputting data to portable electronic devices include voice recognition units. Historically however these voice recognition devices have not proven to be reliable. This unreliability is due to a number of factors. Background noise in an environment containing the portable electronic device can prevent proper recognition by the device of a command from the user. This background noise interferes with the ability of the speech recognition device to correctly discern the spoken word of a user. Other problems include being able to successfully associate specific vocalizations with specific phonemes which can vary among users based on age, gender and culture.

Thus, improved methods of inputting data into portable electronic devices is desired.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a prior art, to-scale portable electronic device utilizing a miniaturized QWERTY keyboard for inputting data.

Figure 2 illustrates an electronic device in accordance with one embodiment of the present invention.

Figure 3 illustrates an electronic device, in the form of a wireless phone, comprising an activation detection device, in accordance with one embodiment.

Figure 4 illustrates an electronic device comprising an activation detection device, in accordance with another embodiment.

Figure 5 illustrates keyboard portion of an electronic device, illustrating an alternative keyboard layout, in accordance with another embodiment.

Figure 6 illustrates an electronic device containing pressure sensors, in accordance with one embodiment.

Figure 7 illustrates the mobile device of Figure 5 in further detail, in accordance with one embodiment.

Figure 8 illustrates an electronic device containing a motion detector in the form of a Micro-ElectroMechanical Systems (MEMS) accelerometer.

Figure 9 illustrates a mobile device containing terminating hand member sensors, in accordance with one embodiment.

Figures 10A-10C illustrate a key accommodating multiple character values, in accordance with one embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Parts of the description will be presented in terms such as portable electronic devices. As well understood by those skilled in the art, the term "portable electronic device" as used herein (hereafter, simply "electronic device"), including in the claims, comprise wireless mobile phones, personal digital assistants (PDAs), and other devices of the like.

The term "wireless mobile phone" as used herein refers to the class of telephone devices equipped to enable a user to make and receive calls wirelessly, notwithstanding the user's movement, as long as the user is within the communication reach of a service or base station of a wireless network service provider. Unless specifically excluded, the term "wireless mobile phone" is to include the analog subclass as well as the digital subclass (of all signaling protocols).

In the following description, various aspects of the present invention will be described. However, it will be apparent to those skilled in the art that the present invention may be practiced with only some or all aspects of the present invention. For purposes of explanation, specific numbers, materials and configurations are set forth in order to provide a thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced without the specific details. In other instances, well-known features are omitted or simplified in order not to obscure the present invention.

Various operations will be described as multiple discrete steps in turn, in a manner that is most helpful in understanding the present invention, however, the order of description should not be construed as to imply that these operations are necessarily order dependent. In particular, these operations need not be performed in the order of presentation.

The phrase "in one embodiment" is used repeatedly. The phrase generally does not refer to the same embodiment, however, it may.

The terms "comprising", "having" and "including" are synonymous, unless the context dictates otherwise.

The phrase "terminating hand members" is intended to indicate a portion of a user hand utilized to activate keys. This includes all five of the fingers, or digits, of the hand including thumb, index finger, middle finger, ring finger and little finger.

The embodiments are described herein with respect to a character set based on the English language. It is to be recognized that the invention may be practiced with alphanumeric data as well as characters of other languages.

While the present invention is described with respect to its improvement over a miniaturized QWERTY keyboard, one skilled in the art will recognized that the present invention may be practiced with respect to other keyboard layouts, such as a miniaturized Dvorak keyboard. Moreover, while the present invention is described with respect to an improvement over a miniaturized QWERTY keyboard, the present invention may be practiced with such keyboards in an attempted to enhance their functionality even further.

Figure 2 illustrates an electronic device **200** in accordance with one embodiment of the present invention. The electronic device **200** contains a reduced keyboard **210** for providing character input to the electronic device **200**. In accordance with the present invention, each key on the reduced keyboard **210** has associated with it multiple character values, e.g. keys are overlaid with multiple character values. The present invention advantageously allows this association of multiple character values with keys by providing a method of determining which character value will be assigned to key activations.

"Activation" means an affirmative action by a user to provide a value associated with a key as input to the electronic device. Key activations may include a traditional mechanical key that, when pressed, causes the key to contact a switch on a circuit board located beneath the key. Alternatively, key activations may mean the touching by a user of a pressure sensitive key.

The reduced keyboard **210** advantageously reduces the number of keys **212** for user input. This allows a given working area to be dedicated to a smaller number of keys than a miniature QWERTY keyboard. As discussed above, when a user tries to key input data on a miniature QWERTY keyboard, an incorrect key can be struck causing erroneous data to be input. Thus, having a reduced keyboard facilitates easier, less error prone user interaction by allowing more area to be dedicated to a key, e.g. have larger keys and/or more space between keys.

The present invention advantageously facilitates detecting which of a user's fingers is to be used to perform a key press. Upon such a determination,

a character value is assigned to keys such that, during a subsequent key activation, the assigned value will be input to the electronic device.

Refer now to Figure 3, which illustrates an electronic device, in the form of a wireless phone **300**, comprising an activation detection device **330**, in accordance with one embodiment. In this embodiment, each key has associated with it two character values. That is to say that, when a user presses a key on the keyboard, one of a number of character values will be assigned to the key press. In the embodiment shown, the letters printed on the keys indicates these multiple functions. Thus, for example, key **312** has associated with it both a "Q" and "Y" function.

Electronic device **300** contains a device **330** to facilitate detection of movement of a user's hands (not shown). By detecting the movement of user's hands, the electronic device **300** can determine which of the two values associated with a key will be input in the device.

Figure 4 illustrates an electronic device **400** comprising an activation detection device **430**, in accordance with another embodiment. In the embodiment shown, the activation detection device comprises a pop-up camera, capable of being stored in a storage well **450** of the electronic device when not in use. In this embodiment, this camera and accompanying software are capable of tracking a user's hand movements. For example, in the embodiment shown, a user's right thumb is in a first position **440** on device **400**. Assume the electronic device of Figure 4 comprises a keyboard similar to the keyboard shown in Figure 3. Further assume a user wishes to input a "Y" into the electronic device **400**. In

order to enter a "Y" into the electronic device, the user utilizes the right thumb to activate key 412. As the user moves the right thumb from a first position 440 towards the key 412 to be activated, the activation detection device is utilized to assign a value to the impending key activation based upon the detected movement of the right thumb between the first position 440 and the second position 434 closer to the key 412 to be activated. In other words, camera device 440 operates as activation detection hardware to facilitate provision of an indication of which of the user's two thumbs will be used to provide input to the electronic device.

As previously mentioned in a prior embodiment, the input keys indicate the multiple character values associated with each key. For example, in the above description, the character value associated with the right thumb, e.g. a "Y" is associated with key 312 as the right thumb is detected in use. However, if it is determined that the left thumb is in motion, then a "Q" is associated with key 312 and an activation of key 312 results in a "Q" being provided as input to the electronic device. Thus, in the embodiment shown, when the right thumb is detected in motion, each key has associated with the character value as shown in solid. Whereas when the left thumb is in motion, the each key has associated with it the character value show in outline. As illustrated the two character values are shown on the keys in black in white. In one embodiment the two character values are shown in different colors, e.g. red for the left thumb values and green for the right thumb values. In this embodiment, the keys have back lighting capability. Thus, when it is detected that a right thumb is to be used for a key

activation, the green values on all keys become back lit. Similarly, when it is detected that a left thumb is to be used for a key activation, the red values on all keys become back lit.

Figure 5 illustrates keyboard portion 500 of an electronic device, illustrating an alternative keyboard layout in accordance with another embodiment. As with the previous embodiment, the keyboard 500 contains fewer keys than a miniaturized QWERTY keyboard. However, this embodiment only has some of its keys with multiple character values. For example, keys located towards the center of the keyboard 520, and therefore closest to the opposite hand, have two values associated with them. In contrast, the keys located more towards the periphery of the keyboard 510 have a single value associated with them. Thus regardless of what hand is utilized to press the periphery keys 510, the character value input to the electronic device will be the same.

In addition to using a camera with motion detection software, to be discussed more fully below, for analyzing the movement of a user's hands, other methods can be utilized to conditionally activate the multiply defined keys. Thus, while fingers are utilized to activate keys, in some cases, hand movements, indicating a user's movement towards a key press, can be detected through other means. For example, as users finger moves closer to a key, pressure on the body in that direction increases.

Figure 6 illustrates an electronic device containing pressure sensors in accordance with one embodiment. In this embodiment, pressure sensors act as

activation detection hardware. An electronic device contains a body **610** and input keys, including input key **626**. In addition, pressure sensors **640 642** are integrated to the body **610**. These pressure sensors **640 642** are utilized to aid in the detection of a user's terminating hand member in the key activation process. For example, as the right thumb **650**, on a user's right hand **630**, is moved **652** towards key **626**, the user's right hand applies inward pressure **660** to the body **610**. This pressure is detected by pressure sensor **640**. This increase in pressure is an indication that the right thumb, vis-à-vis the left thumb, will be utilized to depress key **626** thus assigning a particular definition for a key activation of key **626**.

In another embodiment, a combination of the relative pressures on two pressure sensors **640 642** can be utilized to provide an indication of the assigned value to a key to entry to an electronic device upon key activation. For example, a right finger is utilized to press a key **626** and then returns to a non-use position **650**. When returning to the non-use position **650** the pressure associated with right sensor **642** will be decreasing. At the same time, a left finger moves toward key **626** to perform a key activation. This movement results in an increase in pressure associated with left sensor **640**. This dynamic relationship, increasing pressure on left sensor **640** combined with decreasing pressure on right sensor **642**, can also be used to provide an indicia of which one of a plurality of values corresponding to a key should be associated with a next activation of the key **626**.

Figure 7 illustrates mobile device **300** in further detail, in accordance with one embodiment. As alluded to earlier, for the illustrated embodiment, electronic device **300** is a wireless mobile phone; however, for other embodiments, electronic device **300** may be other electronic devices, including but not limited to PDAs.

As illustrated in **Fig. 7**, the core unit of an electronic device **300**, in the form of a wireless mobile phone, includes conventional elements, such as micro-controller/processor **702**, digital signal processor (DSP) **704**, non-volatile memory **706**, general purpose input/output (GPIO) interface **708**, radio receiver **710**, and transmit/receive (TX/RX) **712** (also known as a transceiver), coupled to each other via bus **714**, and disposed on a circuit board **720**.

The core unit of wireless mobile phone **300** is endowed with activation detection software **736** in support of the activation detection hardware **734**, together "activation detection logic". Except for activation detection hardware **734** and associated activation detection software **736** provided to mobile device **300**, the relevant operating logic of which will be described more fully below, each of these elements **702-714** performs its conventional function known in the art, and is intended to represent a broad range of such element and its equivalents.

Further, TX/RX **712** may be designed to support one or more of any of the known signaling protocols, including but are not limited to CDMA, TDMA, GSM, and so forth. Moreover TX/RX **712** may be implemented using separate transmitter and receiver.

Accordingly, elements **702-714** will not be further described.

<to inventor, any fleshing out you can perform on the following specific implementations of the software supporting the hardware would be great – TO BE REMOVED BEFORE FILING RTW>

As previously alluded to, in various embodiments, activation detection hardware **734** is aided by activation detection software **736**. In an embodiment where the activation detection hardware **734** is a camera, the activation detection software **736** is utilized to analyze image information fed to the activation detection software **736** from the camera. For example, activation detection software is utilized to analyze the movement of a user's hands as discussed above. The camera is utilized to capture temporally adjacent images, such as those of a user's hands. By comparing these temporally adjacent images of a user's hands, the activation detection software can determine which of a user's two hands are utilized in the activation of a key.

By way of example, refer back to Figure 3. Assume a user has just performed a key press of the "E" key with the left thumb thus providing an "E" as input to the electronic device **300**. Immediately after this key press, the user's left hand is moving away from the key and back to the left thumb position **369**. In addition, the right thumb is moving from the right thumb position **367** towards the E key to enter an "I" into the electronic device. Thus, by performing real time temporal analysis and monitoring the position of a user's fingers in temporally adjacent images captured by the camera, activation detection software can

provide an indication to keyboard interpretation routines, as to the value to be assigned to a key activation.

In another embodiment, the "camera" operates by detecting infrared electromagnetic (EM) radiation vis-à-vis visible light spectrum EM. The use of infrared versus visible light EM allows for similar processing as that listed above with respect to the visible light EM. It provides an added advantage of allowing the present invention to work in low light situations where the quality of images available provided by a visible light EM camera is potentially reduced beyond usability.

In another embodiment, motion detectors are utilized as activation detection hardware for aiding in determining values to be assigned to key activations. Figure 8 illustrates an electronic device **800** containing a motion detector in the form of a Micro-ElectroMechanical Systems (MEMS) accelerometer **820**. In this embodiment, as a user activates a key **810**, motions associated with this activation are detected by the accelerometer **820**. For example, as a user activates key **810** with a finger from the right hand, there will be a right to left motion **840** in the key activation causing the movement of the body **800**. This movement can be detected by accelerometer **820** and this information can be utilized by activation detection software to associate one value with the key activation. Similarly, when a finger from the left hand is used to activate key **810**, a left to right motion **850** is detected. This results in the ability to associated a different value with the key activation

In another embodiment, terminating hand member sensors are utilized as activation detection hardware. Refer now to Figure 9, wherein an embodiment compatible with such an implementation is shown. In this embodiment, two terminating hand members in the form of thumbs are used in providing input to electronic device **900**, as previously discussed. In this embodiment, sensors are in place at the right thumb **940** and left thumb **950** idle positions of electronic device **900**. These sensors detect when a thumb is in proximity to its idle position. When key **912** is activated, proximity of a thumb to its home position can be used to provide an indicia of the assigned value. For example, assume that left thumb position sensor **950** indicates that the left thumb is near its idle position when key **912** is activated. By implication an assumption can be made that the right thumb was used to activate key **912** and an "I" is input to electronic device **900**.

In other embodiments, combinations of these methods are utilized to determine assigned values for key inputs. For example, in one embodiment, pressure sensors are used in combination with a camera to determine assigned value for key activations.

Referring again to Figure 3, recall that, in one embodiment, a set of character values on each key are back lit when it is determined which set of character values are to be assigned for input upon key activation. Figure 10A illustrates a key **1010** defined with multiple character values to be associated with the key **1010**, in accordance with one embodiment. The key **1010** has two lenses **1020 1030** through which light can pass. Both lenses of the key are in the shape of a character. The character shapes represent the multiple character

values to be associated with the key 1010. In this embodiment, when it determined by the activation detection logic which value is to be associated with key activations, the appropriate values are backlit on the keys. Thus, as shown in Figure 10B, if it is determined that a terminating hand member from a left hand is to used to activate a key, the "Q" is backlit indicating that it is to be associated with the keys activation.

Utilizing the described method for allowing the overlaying of input keys of an electronic device, there may be occasions where an incorrect interpretation of input assignments is performed. For example, each user has their own personal usage traits and it may be that a particular user's hand motions are such that the activation detection logic incorrectly associates character values with key activations. In such cases, an ability to recover from this situation is desirable.

Refer again to Figure 10B. As previously mentioned, if it is determined that a terminating hand member from a user's left hand is to activate a key, the "Q" is backlit indicating that it is to be associated with the key's activation. In order to compensate for the possibility that this association may have been an incorrect determination, in one embodiment, after a period of time where an association has been made, if there is no activation, the activation detection logic will associate the "Y" value with the key activation. This will be accompanied by a change in the backlighting, as shown in Figure 10C.

Thus, a method for utilizing activation detection mechanisms for determining input values from keys is disclosed.

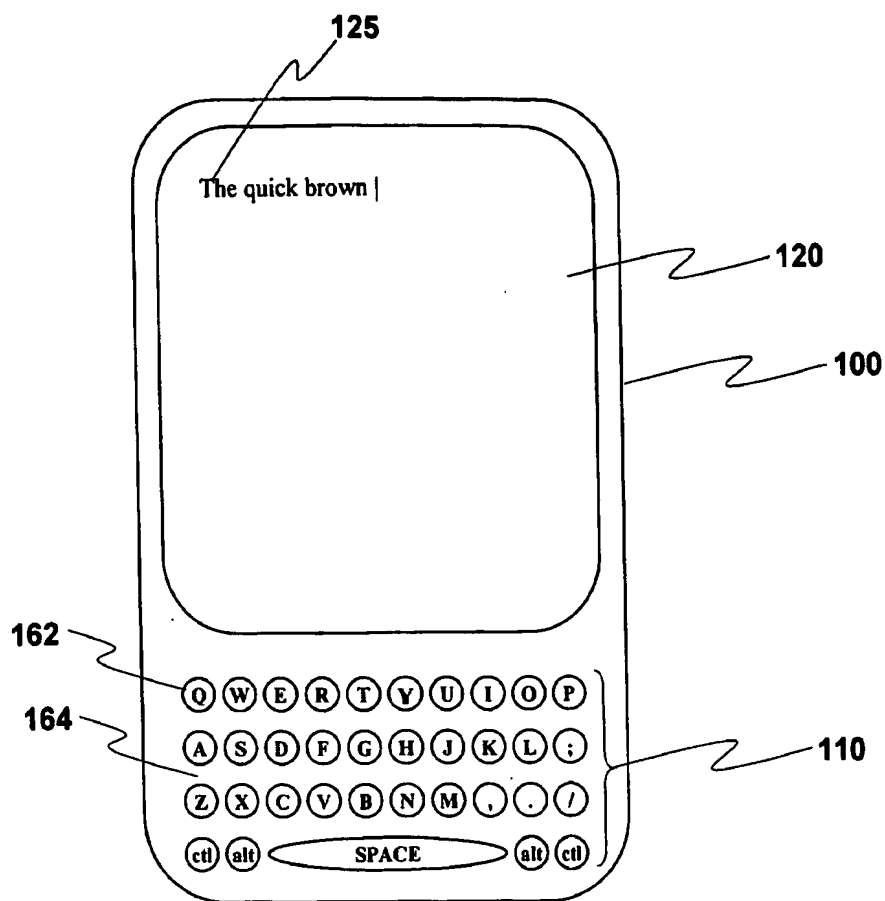


Figure 1 – Prior Art

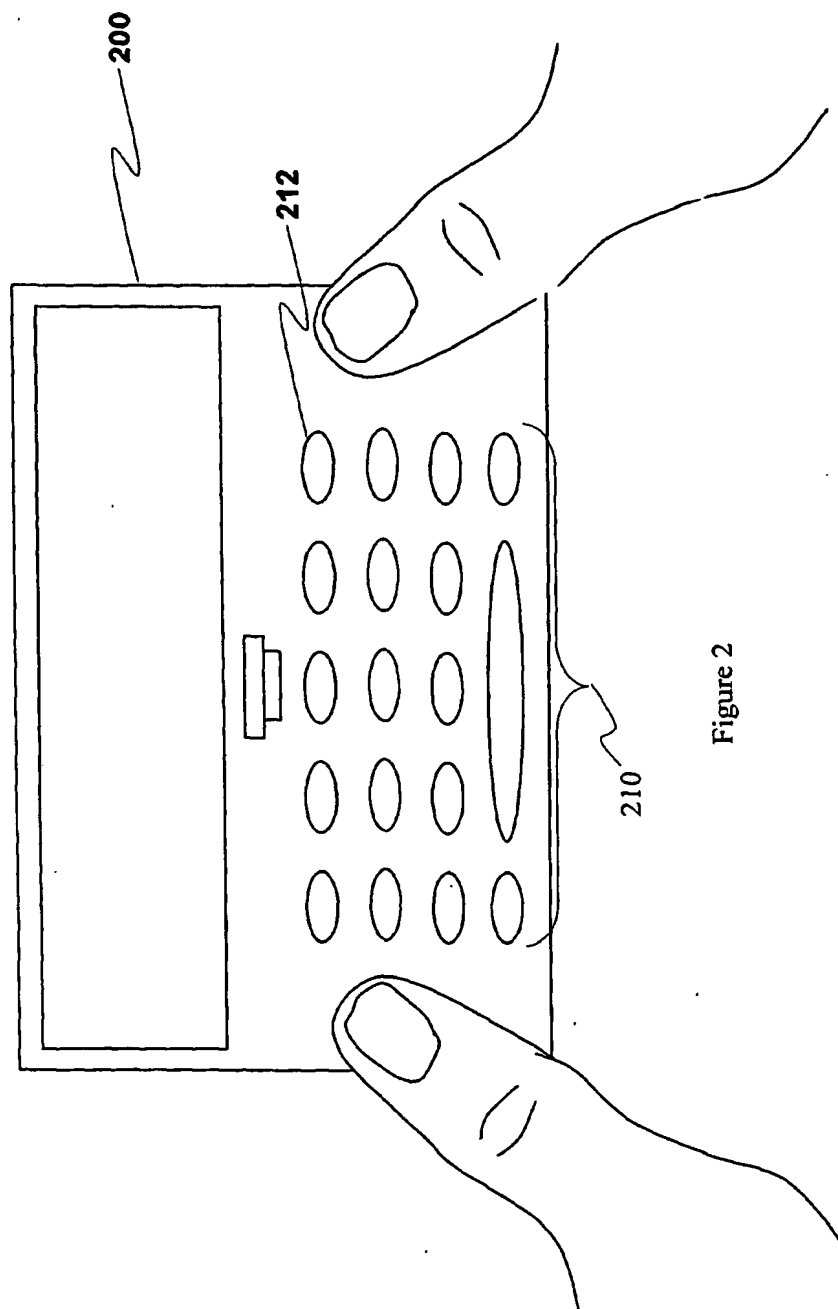


Figure 2

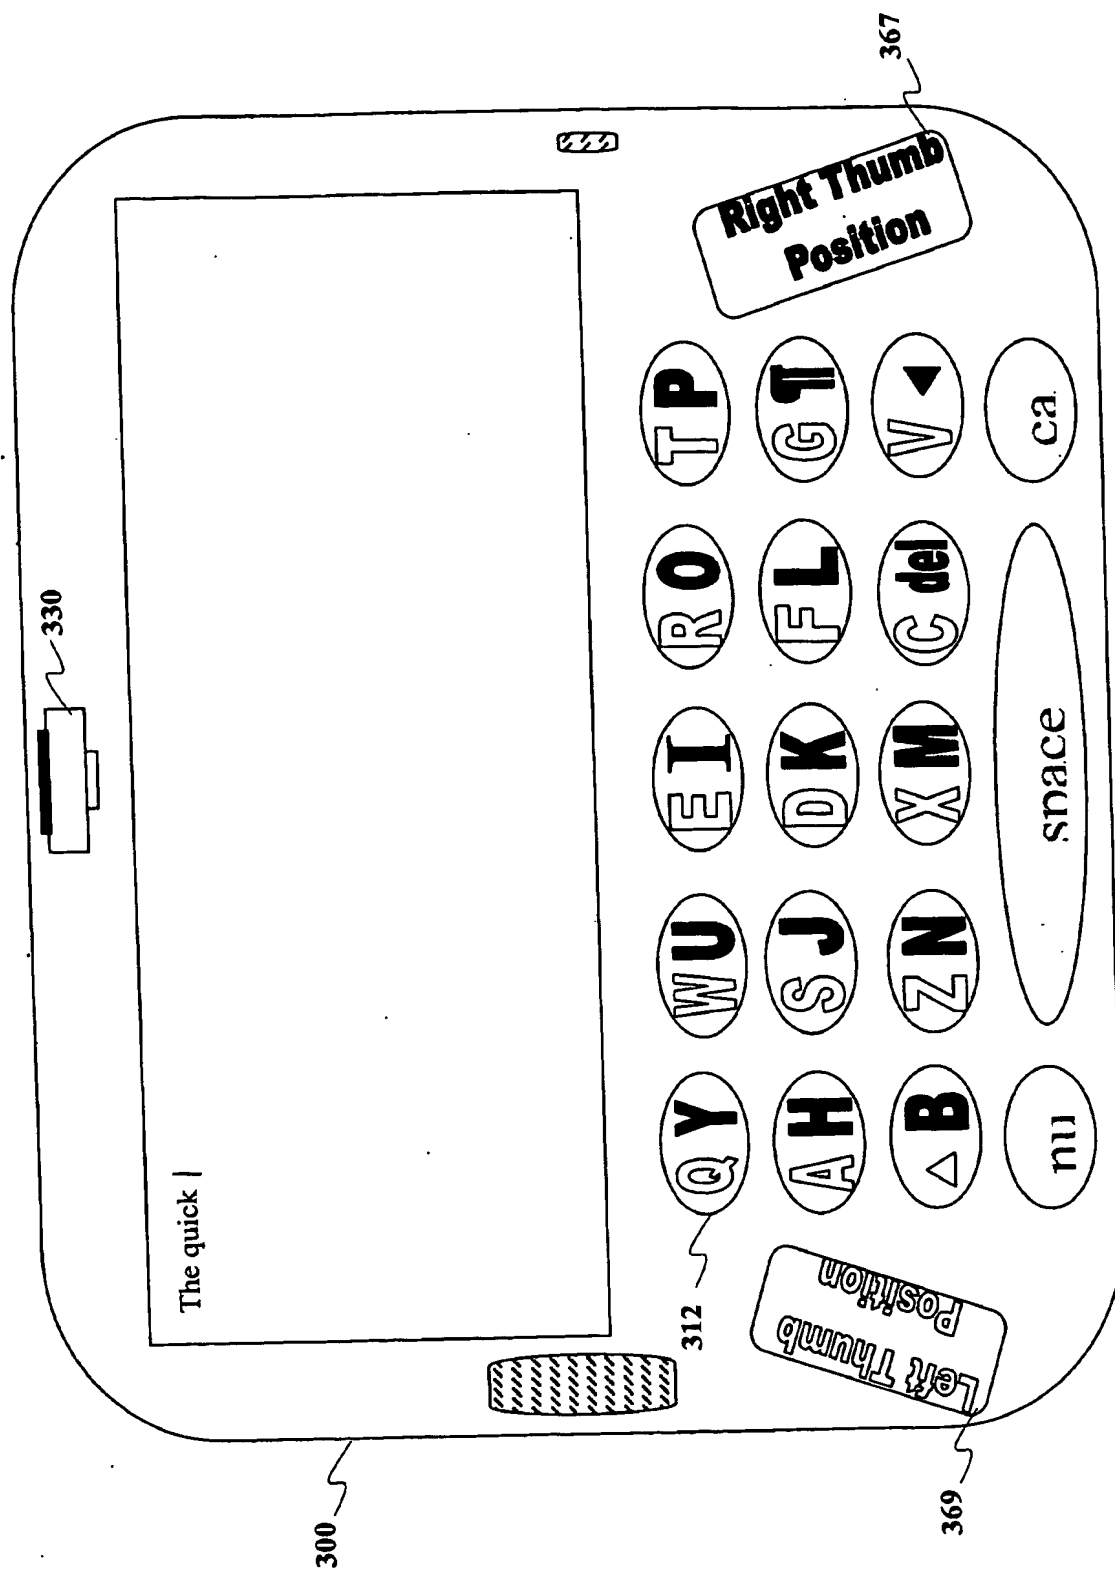


Figure 3

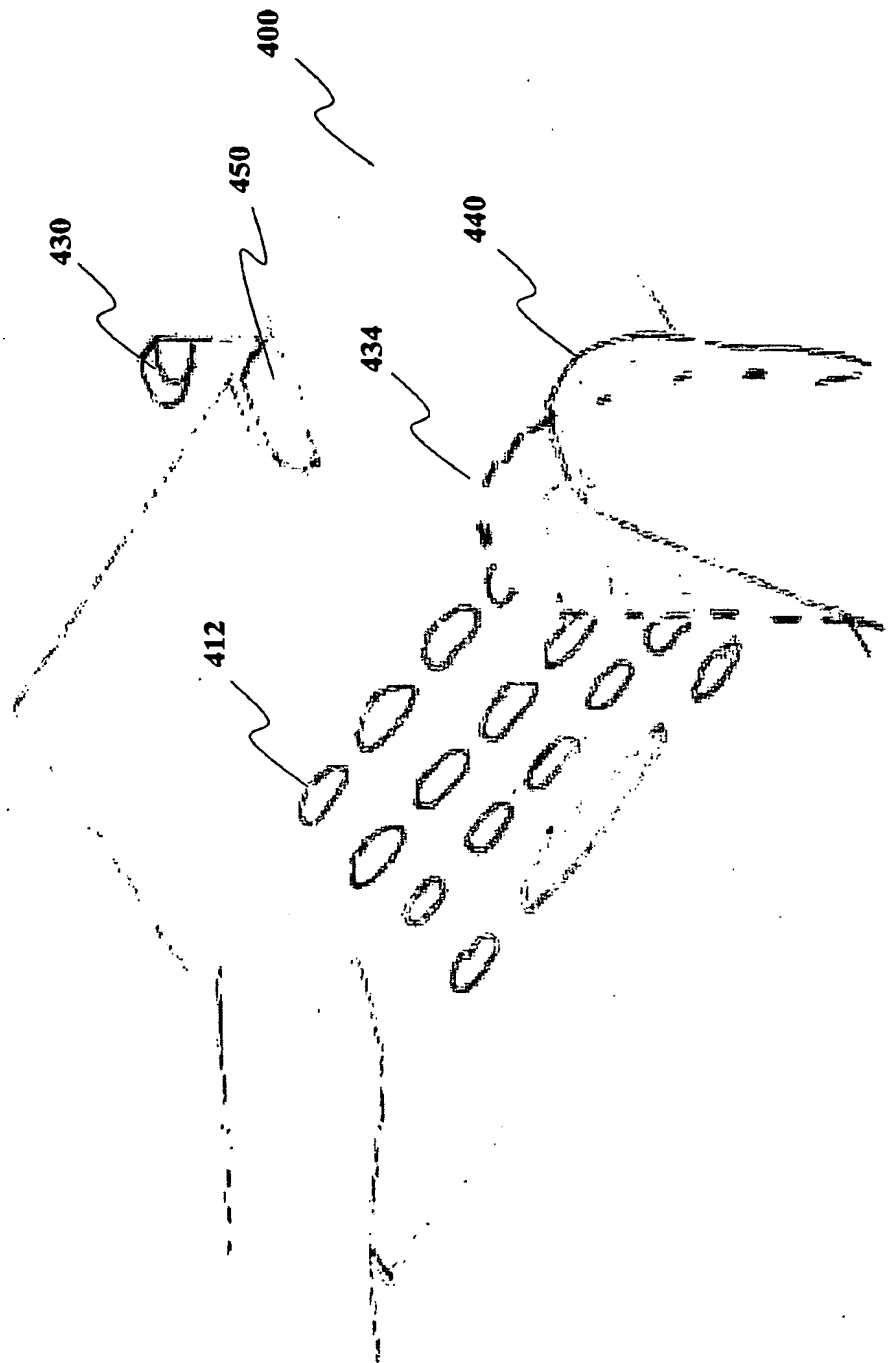


Figure 4

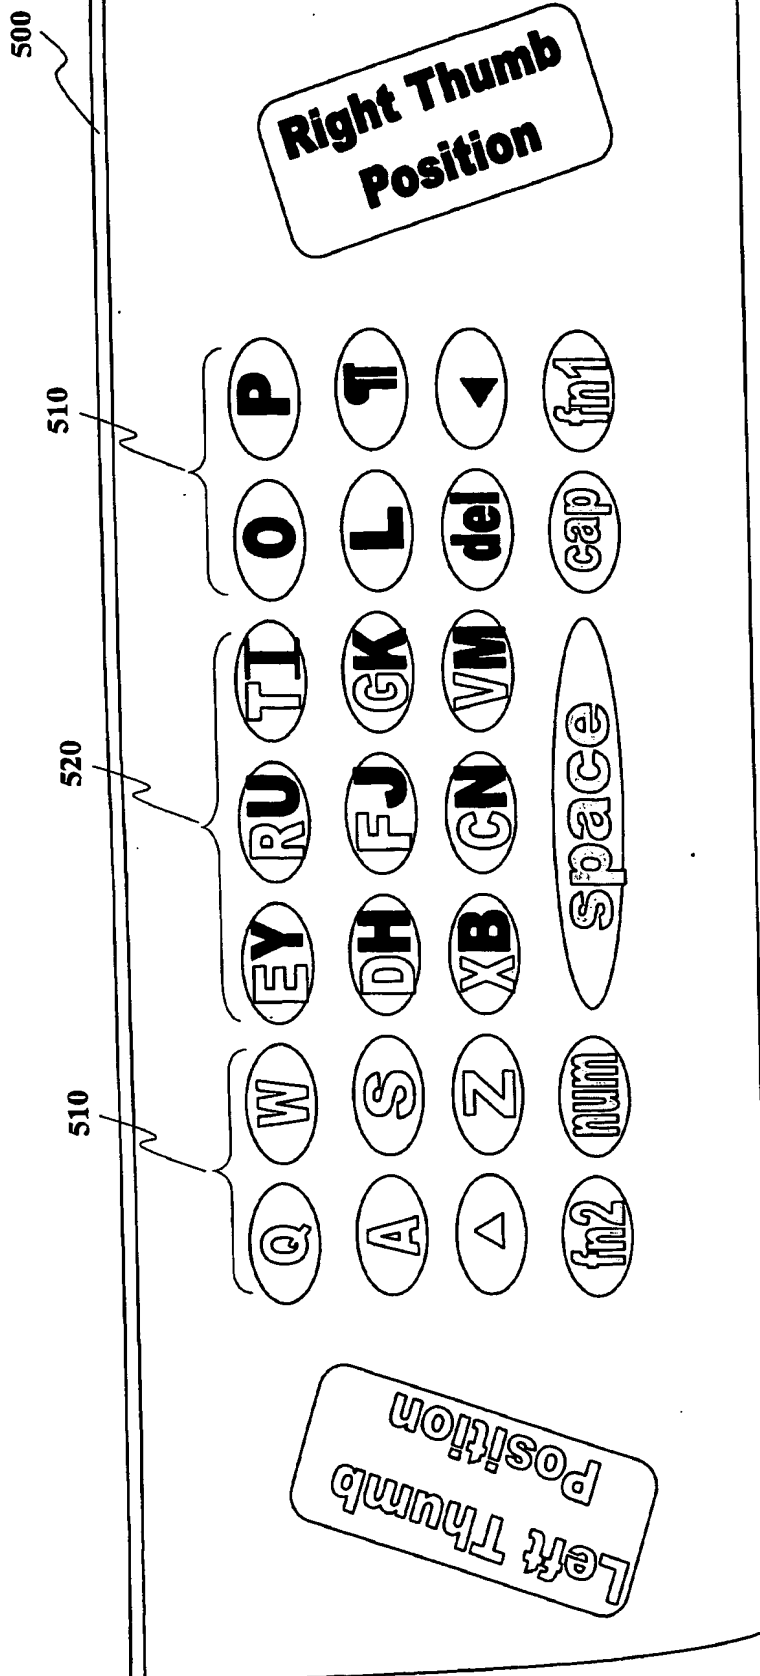


Figure 5

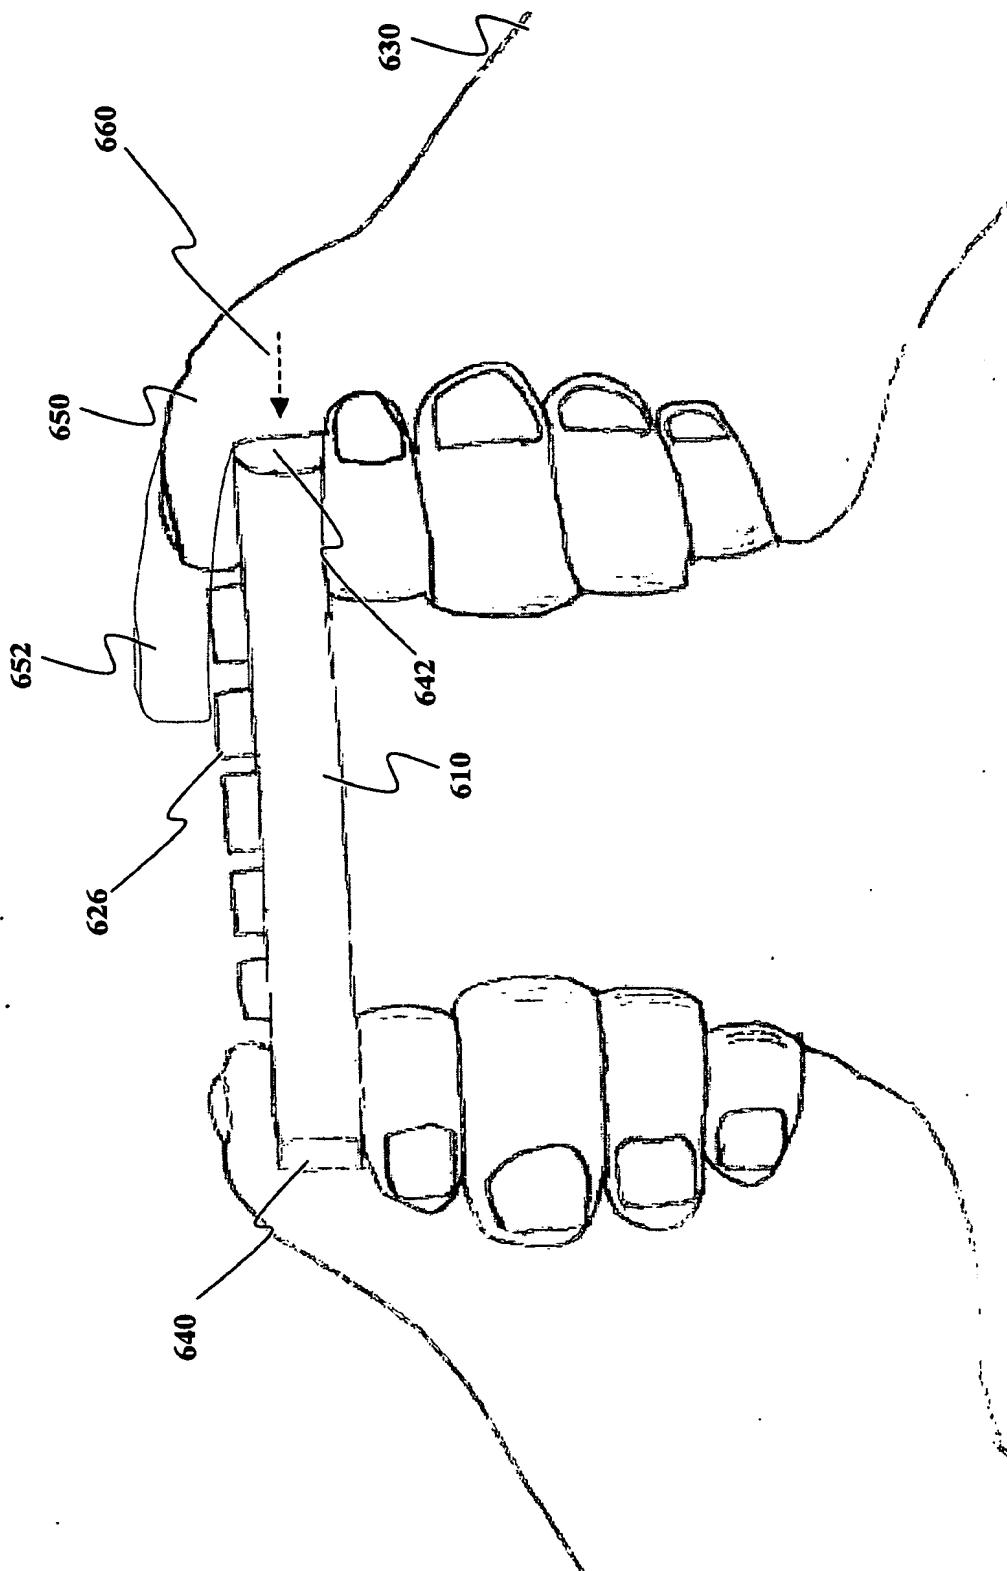


Figure 6

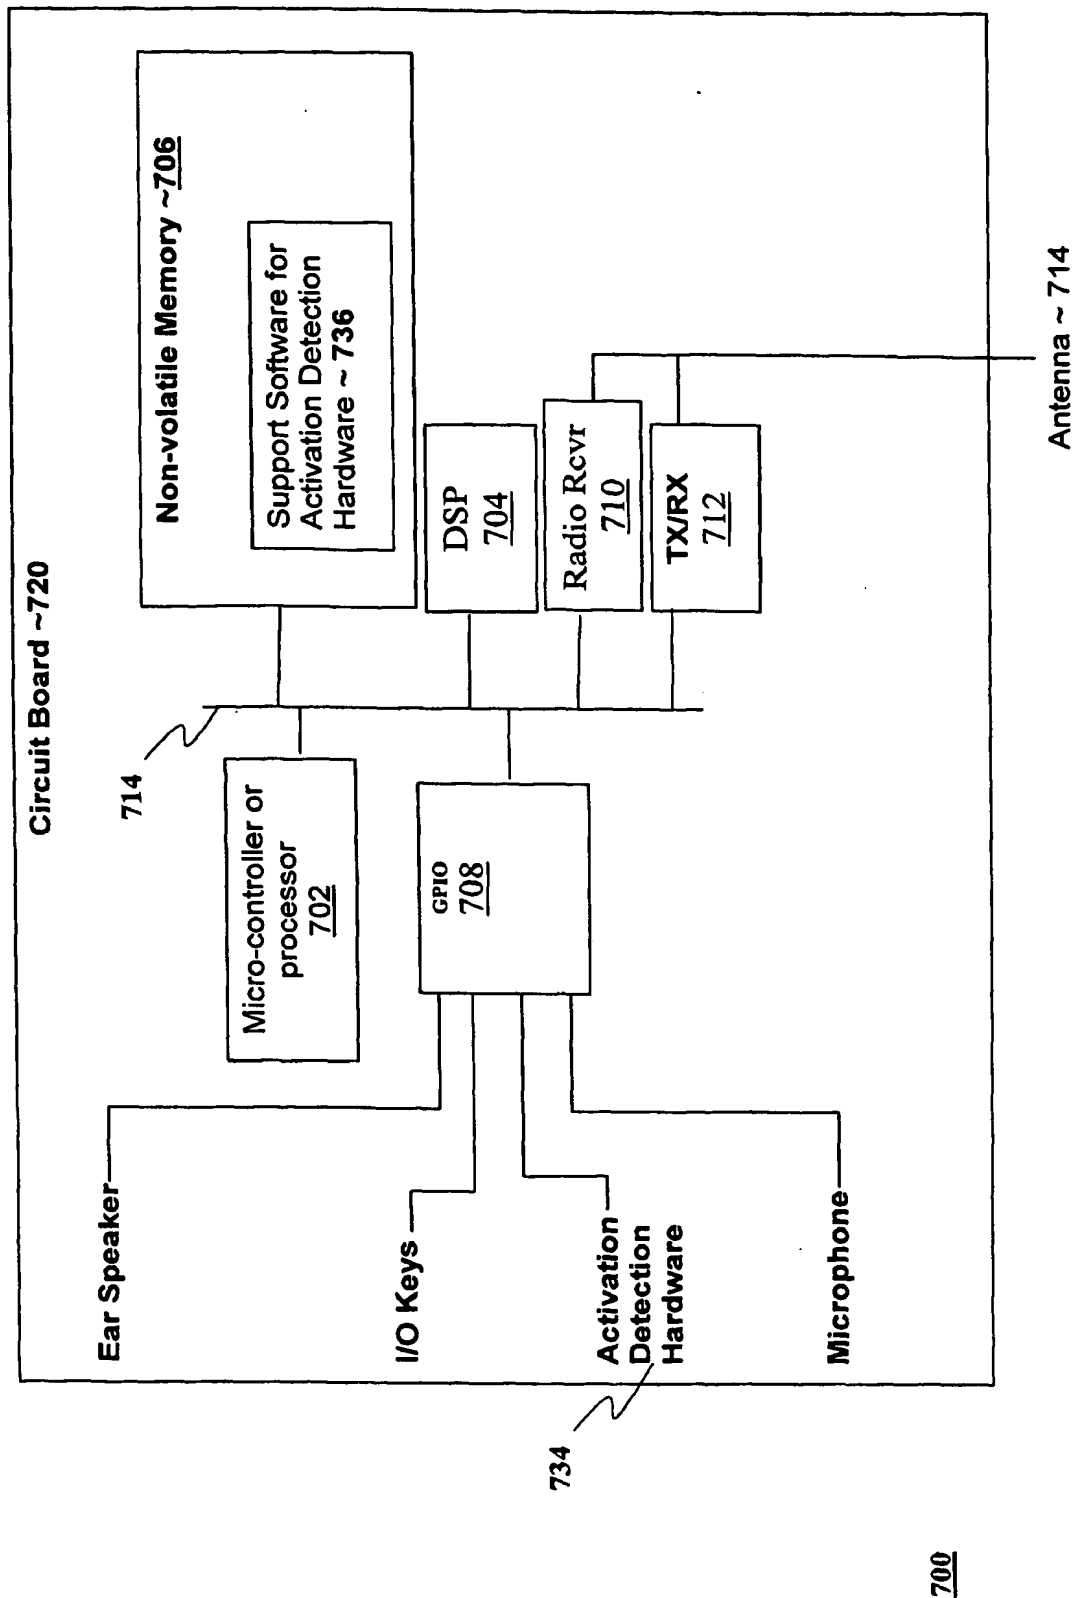


Figure 7

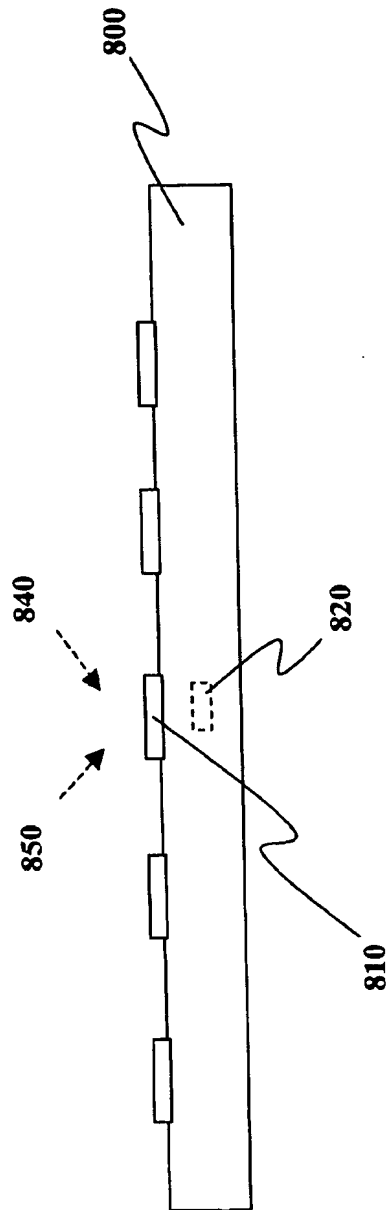


Figure 8

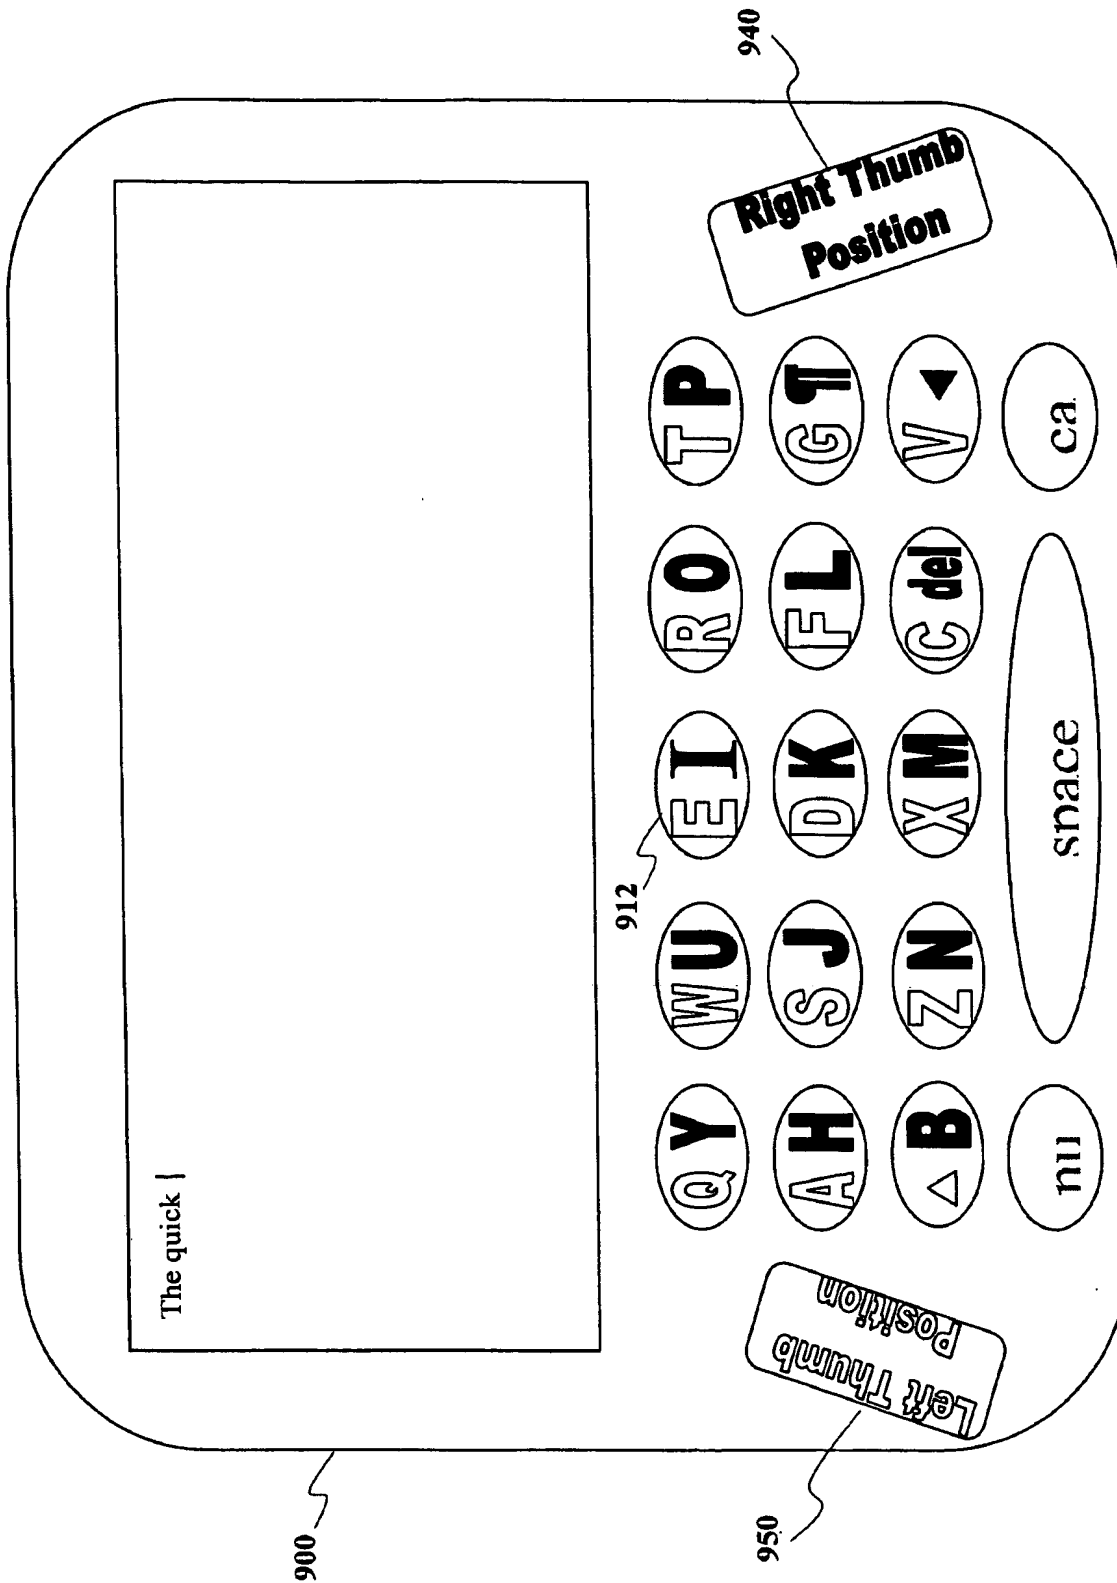


Figure 9

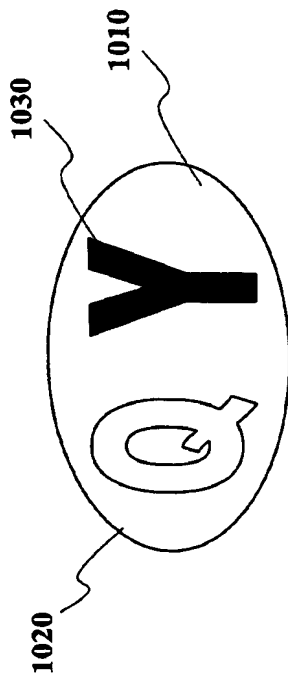


Figure 10a

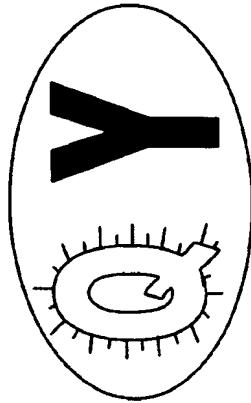


Figure 10b

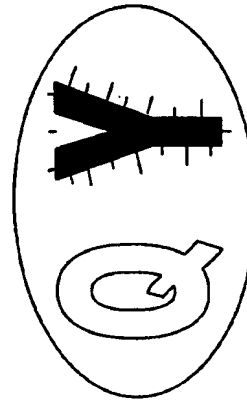


Figure 10c